


# Rohr

# SRI



## Dimensionen

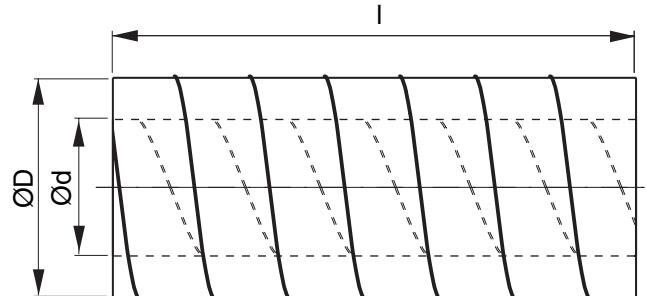

## Beschreibung

Isoliertes Wickelfalzrohr.

## Typ 25

Ød nom	ØD mm	l std mm	m <sub>l</sub> kg/m
100	150	3000	4,20
125	180	3000	5,10
150	200	3000	5,70
200	250	3000	7,40
250 *	300 *	3000	9,80
300 *	355 *	3000	12,5
355 *	400 *	3000	14,6
400 *	450 *	3000	16,4
450 *	500 *	3000	17,4
500 *	560 *	3000	22,1

## Typ 50

Ød nom	ØD mm	l std mm	m <sub>l</sub> kg/m
100	200	3000	5,70
125	224	3000	6,50
150	250	3000	7,50
200	300	3000	10,0
250 *	355 *	3000	12,1
300 *	400 *	3000	14,8
355 *	450 *	3000	16,9
400 *	500 *	3000	19,0
450 *	560 *	3000	22,9
500 *	600 *	3000	24,9

\* mit Versteifungssicke

## Bestellbeispiel

