


The universal Twist Clamps are used in conjunction with Pipe Brackets for quick and easy support of all types of pipework within mechanical and plumbing services.

## FEATURES / BENEFITS


- Up to 6 times faster than traditional methods
- Universal - for pipe sizes 15 mm Copper (OD15) to 3" / DN80 Steel (OD89) pipework
- Replaces more than 11 different pipe ring sizes
- Simplifies 'take-off' process
- Easy site storage, reduces waste
- ¼ turn fixing - tool free attachment and adjustment
- Available with Kooltherm / Armaflex pipe collars for insulated pipe
- 45 kg SWL, with a 5:1 safety factor
- Supplied in a choice of kits with a Pipe Bracket (PB640, PB380 or PB230)



## INSTALLATION

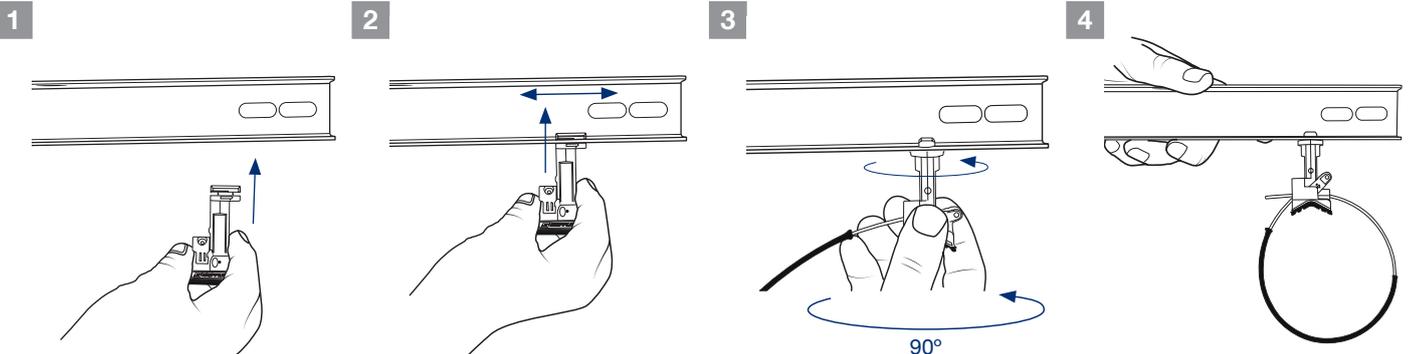

## PRODUCT SPECIFICATION

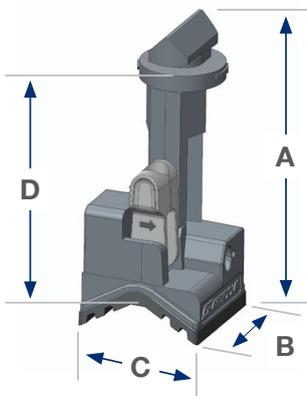

- Lloyd's certified
- #2 wire – 45 kg SWL (5:1)
- Provides insulation against vibration
- Clearance between pipe and bracket for insulation
- integral mounting pillar and ¼ turn attachment to pipe bracket
- Retractable, removable sleeve, pre-fitted to wire rope to prevent galvanic corrosion
- Suitable for use with PB – PB640 (long), PB380 (medium) and NEW PB230 (short)

	A (mm)	B (mm)	C (mm)	D (mm)
GC2-T	68.5	29.4	29.9	52.1

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.

BUS-PI-MEP-ENG-PB&TC

[www.gripple.com](http://www.gripple.com)



Gripple Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ  
Tel 0800 018 4264 Fax 0114 275 1155 email [info@gripple.com](mailto:info@gripple.com)


Pipe brackets are supplied with universal Twist Clamps for quick and easy support of pipework within mechanical and plumbing services.

## FEATURES / BENEFITS

- **Quick and easy installation** - Pipe Brackets are supplied with universal Twist Clamps featuring ¼ turn fixing.
- **Versatile** - Can be bolted directly to soffit or wall, or suspended from the soffit using threaded rod or Hanger system e.g. Trapeze System
- **Saves labour time** - Eliminates the need for cutting channel on site, allowing more productive use of labour.
- **Universal** - For pipe sizes 15 mm copper (OD15) to 3" / DN80 steel (OD89).
- **Compatible** - Integrates with Trapeze TPZ No.2 and Y-Fit.
- **Improves health and safety** - No tools or "Hot Works" permit required for installation.



## MOUNTING CONCEPTS

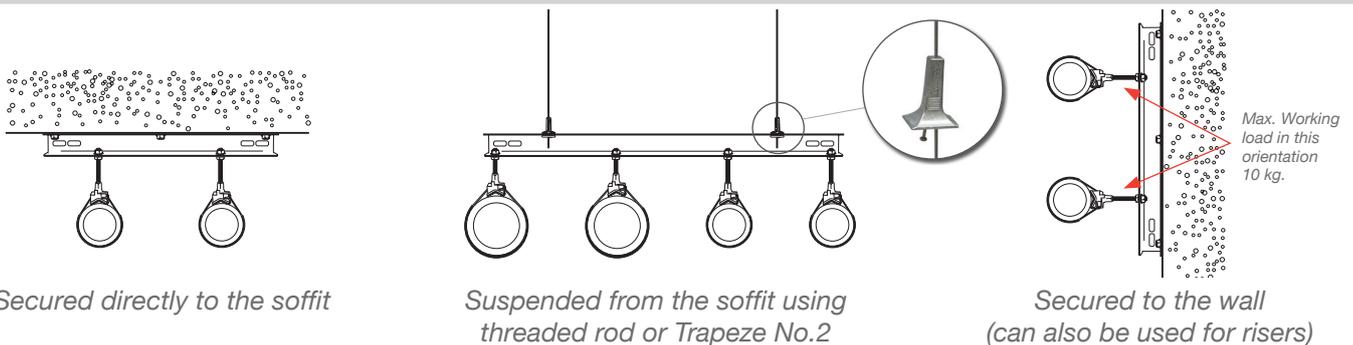

## PRODUCT SPECIFICATIONS

Maximum Working Load - 90 kg

Product Information	Bracket Length (mm)	Configuration	Max Pipe Centres (mm)
PB230	230	With 2 clamps	150
PB380	380	With 2 clamps	150 / 200
		With 3 clamps	150
PB640	640	With 4 clamps	150 / 200
		With 5 clamps	150

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.

BUS-PI-MEP-ENG-PB&TC

[www.gripple.com](http://www.gripple.com)



Gripple Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ  
Tel 0800 018 4264 Fax 0114 275 1155 email [info@gripple.com](mailto:info@gripple.com)